
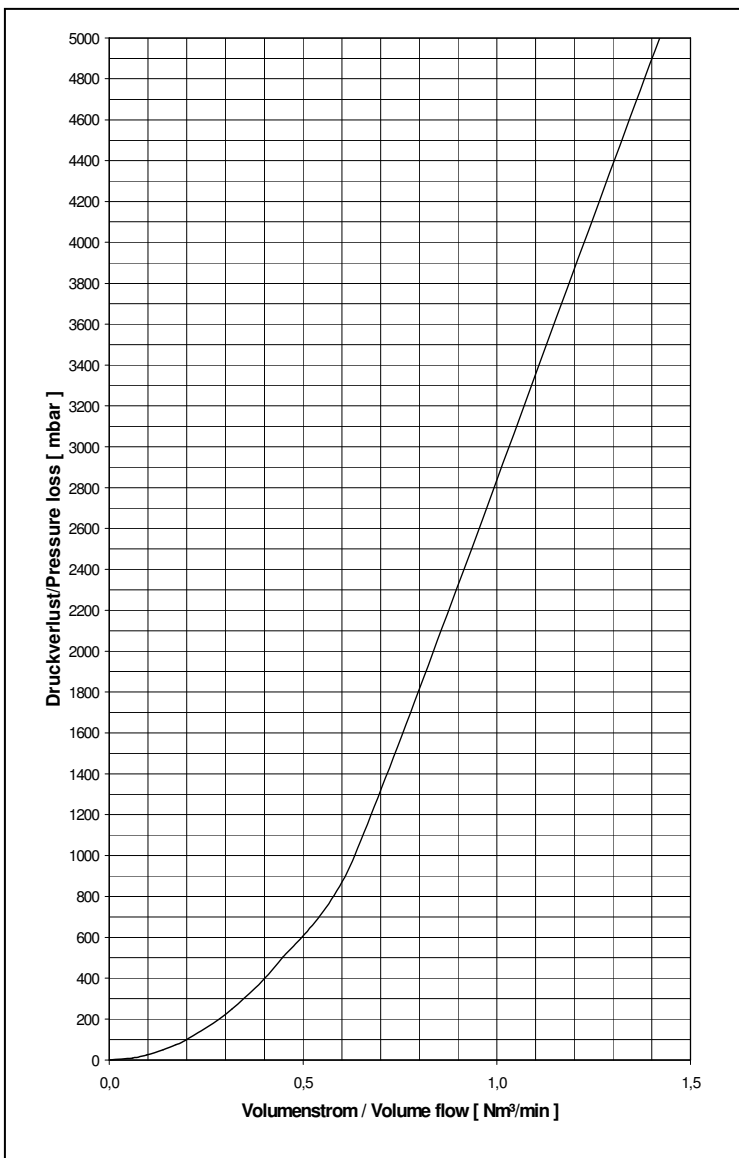


| | |
|---|--|
| End of line liquid product detonation flame arrester | : 1004-0003-20 |
| EC design test certificate | : IBExU 09 ATEX 2101 X |
| Explosion group | :  G IIB3 |
| Flange | : DN25 ISO1092-1 (DIN 2576) PN10(16) |
| Length | : 580 mm |
| Weight | : 11 kg |

Pressure loss
Medium Water
 $\rho = 1000 \text{ kg/m}^3, t = 15^\circ\text{C}$



1004-0003-20

| |
|---|
| Material: |
| <u>Housing</u> V2A / AISI 321 |
| <u>Gasket</u> PTFE |
| Operating data: |
| Absolute pressure : atmospheric |
| Temperature : $\leq 60^\circ\text{C}$ |
| Nominal pipe size : $\leq \text{DN25 mm}$ |